

15PZB100

LF Drivers - 15.0 Inches

1400 W continuous program power capacity
100 mm (4 in) copper voice coil
40- 2000 Hz response
97 dB sensitivity
Double silicone spider with optimized compliance



Specifications

Nominal diameter	380 mm (15.0 in)
Nominal impedance	8 Ω
Minimum impedance	6.4 Ω
Nominal power handling ¹	700 W
Continuous power handling ²	1400 W
Sensitivity (1W/1m) ³	97.0 dB
Frequency range	40 - 2000 Hz
Voice coil diameter	100 mm (4.0 in)
Winding material	Copper
Former material	Glass Fibre
Winding depth	21 mm (0.83 in)
Magnetic gap depth	9 mm (0.35 in)
Flux density	1.15 T

Design

Surround shape	Double Roll
Cone shape	Exponential
Magnet material	Ferrite

Design

Spider	Double Silicone
Pole design	Straight Pole
Woofer cone treatment	WP Waterproof Front Side
Recommended enclosure	105.0 dm ³ (3.7 ft ³)
Recommended tuning	39 Hz

Parameters⁴

Fs	39 Hz
Re	5.2 Ω
Qes	0.3
Qms	6.5
Qts	0.29
Vas	110.0 dm ³ (3.8 ft ³)
Sd	855.0 cm ² (132.5 in ²)
η_0	2.1 %
Xmax	8.0 mm
Xvar	6.5 mm
Mms	154 g
Bl	25.8 Txm

Parameters

Le	2.0 mH
EBP	130 Hz

Mounting And Shipping Info


Overall diameter	393 mm (15.5 in)
Bolt circle diameter	374 mm (14.7 in)
Baffle cutout diameter	354.0 mm (13.9 in)
Depth	174 mm (6.85 in)
Flange and gasket thickness	16 mm (0.62 in)
Air volume occupied by driver	5.2 dm ³ (0.18 ft ³)
Net weight	11.8 kg (26.0 lb)
Shipping units	1
Shipping weight	13.1 kg (28.8 lb)
Shipping box	450x450x200 mm (17.7x17.7x7.9 in)

Service Kit

RCK15PZB1008

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

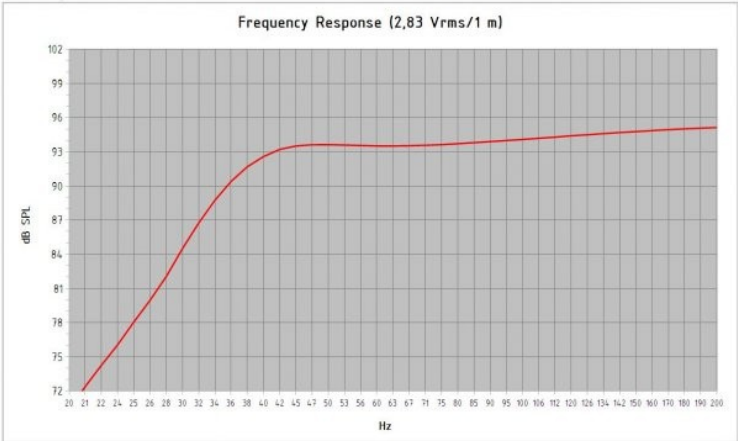

Model: **15 PZB 100**
Enclosure Type: **Bass Reflex**

Internal Net Volume (Liters):	105	Port Area (cm ²):	222.3
Tuning Frequency (Hz):	39	Port Length (cm):	27.2
Frequency (-3 dB) (Hz):	40.5		

Excursion Limited Maximum SPL at 1 meter (dB): **118.2** equal to **220.4** Watts (Bass Band Power Rating)
Thermal Limited Maximum SPL at 1 meter (dB): **123.3** equal to **700.0** Watts (Mid Band Power Rating)