




15SW100

LF Drivers - 15.0 Inches

3000 W continuous program power capacity
100 mm (4 in) split winding copper voice coil
40 - 1500 Hz response
95 dB sensitivity
57 mm peak-to-peak excursion before damage
Double silicone spider with optimized compliance
Ventilated voice coil gap for reduced power compression
Aluminium demodulating ring for very low distortion

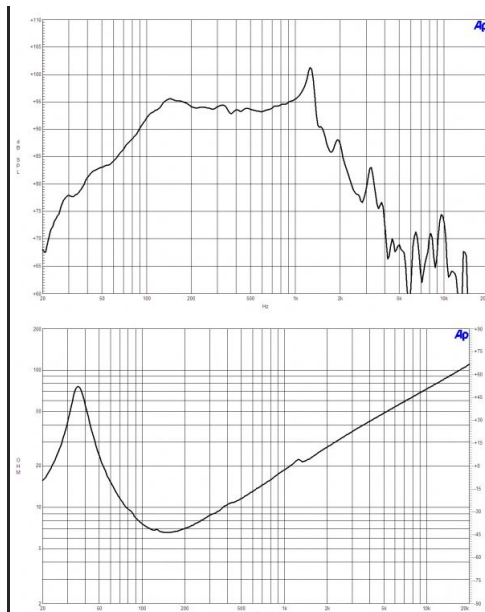

Specifications

Nominal diameter	380 mm (15.0 in)
Nominal impedance	8 Ω
Minimum impedance	6.5 Ω
Nominal power handling ¹	1500 W
Continuous power handling ²	3000 W
Sensitivity (1W/1m) ³	95.0 dB
Frequency range	40 - 1500 Hz
Voice coil diameter	100 mm (4.0 in)
Winding material	Copper
Former material	Glass Fibre
Winding depth	32 mm (1.26 in)
Magnetic gap depth	16 mm (0.63 in)
Flux density	1.15 T

Design

Surround shape	Triple Roll
Cone shape	Radial
Magnet material	Neodymium Inside Slug

Design

Spider	Double Silicone
Pole design	T-Pole
Woofer cone treatment	TWP Waterproof Both Sides
Recommended enclosure	120.0 dm ³ (4.24 ft ³)
Recommended tuning	35 Hz

Parameters⁴

Fs	37 Hz
Re	5.4 Ω
Qes	0.34
Qms	4.8
Qts	0.31
Vas	110.0 dm ³ (3.9 ft ³)
Sd	855.0 cm ² (132.5 in ²)
η_0	1.6 %
Xmax	12.5 mm
Xvar	13.0 mm
Mms	176 g
Bl	25.6 Txm

Parameters

Le	2.2 mH
EBP	108 Hz

Mounting And Shipping Info


Overall diameter	393 mm (15.5 in)
Bolt circle diameter	374 mm (16.7 in)
Baffle cutout diameter	353.0 mm (13.9 in)
Depth	190 mm (7.5 in)
Flange and gasket thickness	16 mm (0.63 in)
Air volume occupied by driver	6.0 dm ³ (0.21 ft ³)
Net weight	9.5 kg (21.0 lb)
Shipping units	1
Shipping weight	10.9 kg (24.0 lb)
Shipping box	420x420x200 mm (16.5x16.5x7.9 in)

Service Kit

RCK15SW1008

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

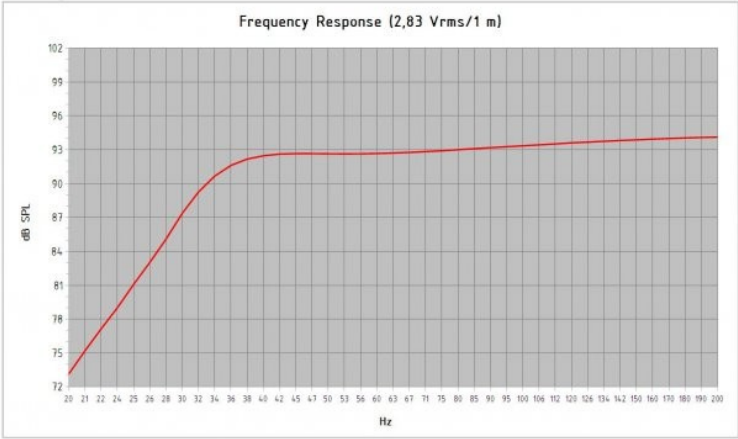

Model: **15 SIW 100**
Enclosure Type: **Bass Reflex**

Internal Net Volume (Liters):	120	
Tuning Frequency (Hz):	35	Port Area (cm ²): 222.3
Frequency (-3 dB) (Hz):	35.8	Port Length (cm): 30.8

Excursion Limited Maximum SPL at 1 meter (dB): **120.3** equal to **465.6** Watts (Bass Band Power Rating)
Thermal Limited Maximum SPL at 1 meter (dB): **125.4** equal to **1500.0** Watts (Mid Band Power Rating)